

# SELLE SMP

## 100% HANDMADE *for* TRIATHLON

### 1 CENTRAL CHANNEL

the result of extensive biomechanic studies on saddle positioning and on the structure of the human pelvis, it is distributed over the whole length of the saddle, from the rear to the tip. Irrespective of the position of the triathlete, it prevents compression of the perineal structures. It promotes very good aeration of the genital area and water drainage.

### 2 "EAGLE BEAK" TIP

The exclusive and patented configuration of the nose prevents crushing of the uro-genital area, even at the extremely low positions of the handlebars, typical of the triathlete, and also enables to safely and firmly park the bike on the bike parking tube frame at the transition area.

### 3 REAR LOGO

the structure of the characteristic rear Selle SMP logo, with its peculiar reflecting properties, provides optimum support for the bike on the bike parking tube frame at the transition area, should the triathlete prefer rear positioning rather than the front one.

### 5 SITTING POSITION

it guarantees maximum comfort for the specific maximum advancement position on the saddle of the triathlete. The characteristic conformation of the SMP rear depression, although less evident due to the new padding, is preserved also in T models, in order to provide the necessary support while pedalling. Four specific models based on the desired level of padding and trousers size.

### 4 FRAME LENGTH

it offers the widest adjustment range available on the market, giving every person the possibility to identify the perfect position for them in terms of saddle advancement towards the handlebars, typical of triathlon.

100% Handmade in Italy  
CERTIFIED


PADDINGHIGH

### T1



#### Indications

Size: **L - XL - XXL**  
People with **wide pelvis**  
**High padding**  
Available in the CRB version



#### Technical specifications


Standard version weight: **375 g**  
CRB version weight: **320 g**  
Dimensions: 257 x 164 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm

### T2



#### Indications

Size: **M - L - XL**  
People with **medium-large pelvis**  
**High padding**  
Available in the CRB version



#### Technical specifications

Standard version weight: **375 g**  
CRB version weight: **320 g**  
Dimensions: 260 x 156 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm

### T3



#### Indications

Size: **S - M - L**  
People with **medium size pelvis**  
**High padding**  
Available in the CRB version



#### Technical specifications

Standard version weight: **290 g**  
CRB version weight: **235 g**  
Dimensions: 246 x 133 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm

### T4



#### Indications

Size: **M - L - XL**  
People with **medium size pelvis**  
**High padding**  
Available in the CRB version



#### Technical specifications

Standard version weight: **295 g**  
CRB version weight: **240 g**  
Dimensions: 246 x 135 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm



SELLE SMP

Selle SMP sas - Via Einstein, 5 - 35020 Casalserugo (PD) - Italy  
Tel. +39 049 643966 - Fax +39 049 8740106 - info@sellesmp.com  
ISO 9001:2008 certified

sellesmp.com




# SELLE SMP

## the CLASSICS also for TRIATHLON


### PRESSURE RELIEF AREA

Distributed along the whole length of the saddle, from the rear to the tip. Whatever the triathlete's position, it prevents the compression of the delicate perineal structure, avoiding vein and capillary vessel occlusion and the chance of nerve injury.



### SUPPORT AREA

It is the result of in-depth ergonomics studies. It supports the cyclist's weight precisely distributing it over pelvic bones (ischial tuberosities) and buttocks. It protects the coccyx from bruises and shocks caused by the roughness of the terrain.

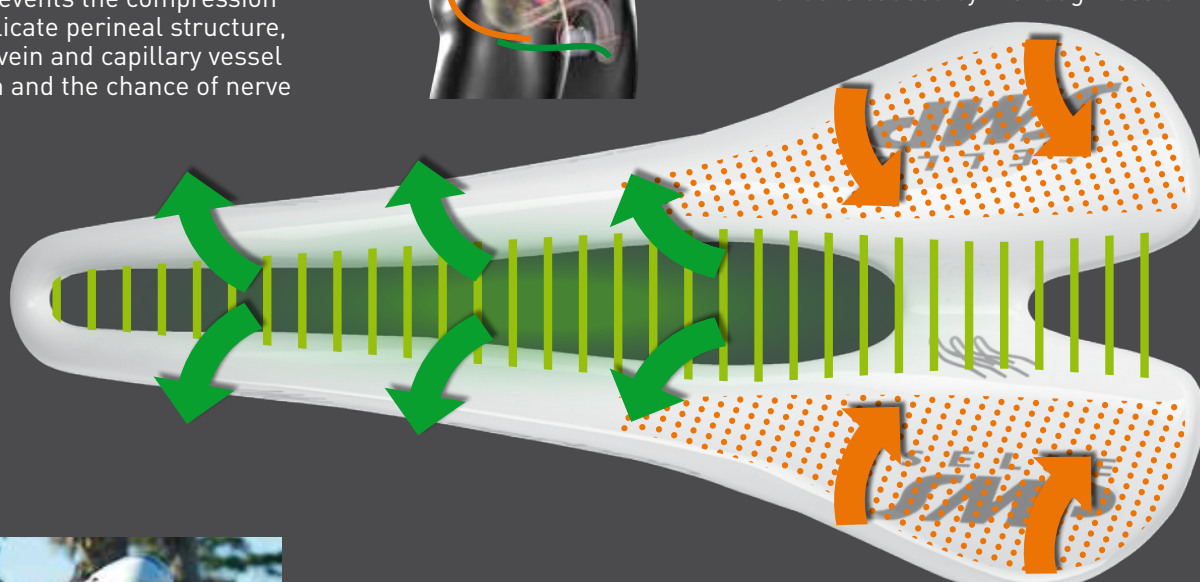

**4 international patents** developed "in collaboration with a medical team of urologists and andrologists\*" and supported by studies published in the "Journal of Sexual Medicine".

\*G. Breda, MD - E. Lunardon, MD - A. Caruso, MD: Department of Urology, S. Bassiano Hospital, Bassano del Grappa (VI), Italy; N. Piazza, MD: Department of Urology, SS. Giovanni and Paolo Hospital, Venice, Italy; V. Bernardi, MD: Department of Anaesthesia, S. Bassiano Hospital, Bassano del Grappa (VI), Italy.

100% Handmade in Italy  
CERTIFIED

PADDING STANDARD

### AVANT



Technical Data Sheet

Size: **L - XL - XXL**  
Standard version weight: **350 g**  
CRB version weight: **300 g**  
Dimensions: 269 x 154 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
Available in CRB and Lady versions (white or black)  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm

### DRAKON



Technical Data Sheet

Size: **M - L - XL**  
Standard version weight: **290 g**  
CRB version weight: **240 g**  
Dimensions: 276 x 138 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm

### STRATOS



Technical Data Sheet

Size: **XS - S - M - L**  
Standard version weight: **260 g**  
CRB version weight: **210 g**  
Dimensions: 266 x 131 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm

### GLIDER



Technical Data Sheet

Size: **M - L - XL**  
Standard version weight: **270 g**  
CRB version weight: **220 g**  
Dimensions: 266 x 136 mm  
Body: nylon 12 reinforced with carbon fibre  
Cover: black leather or microfiber  
Standard frame: AISI 304 stainless steel tube ø7,1mm  
CRB version frame: unidirectional carbon fibre 7.1x9.6 mm



Selle SMP envisages two different steps for the identification of the best model for each triathlete:

### 1. SELECT THE PADDING LEVEL:

The first column of the **SMP SADDLE SELECTION TABLE** includes 2 categories, based on the padding level.

Triathletes that prefer a more comfortable seat can choose the **HIGH PADDING** category; for those who prefer harder saddles, Selle SMP offers the models belonging to the **STANDARD PADDING** category of the classic and popular SMP4BIKE PROFESSIONAL range.

### 2. SELECT THE MODELS SUITED TO YOUR SIZE


Anthropic statistical studies have enabled SELLE SMP to identify pelvis width "categories", and therefore trousers sizes, in which the morphological variability of the various structures, although with due care and exemptions, is rather limited and is statistically valid in 75 % of cases.

By selecting the column corresponding to your trousers size, based on the previously selected padding level, it is possible to identify the model - or the models - that Selle SMP recommends depending on one's pelvis structure.

All models are absolutely UNISEX.

As an additional information, not necessary during the standard selection procedure, the last column on the right of the table shows the width (in mm) of each model, providing technicians also with a precision size detail.

Category	Model	S	M	L	XL	XXL	Width of the saddle (mm)
PADDING HIGH	T1						164
	T2						156
	T3						133
	T4						135
PADDING STANDARD	AVANT						154
	DRAKON						138
	STRATOS						131
	GLIDER						136



Ed. Aug. 2014 We are not liable for any errors in this brochure and reserve the right to change products as we deem necessary, without jeopardising features.

EN



Selle SMP sas - Via Einstein, 5 - 35020 Casalserugo (PD) - Italy  
Tel. +39 049 643966 - Fax +39 049 8740106 - info@sellesmp.com  
ISO 9001:2008 certified

sellesmp.com

